

260A 412A 415A

active loudspeaker systems

MANUALE ISTRUZIONI **INSTRUCTION MANUAL** BEDIENUNGSANLEITUNG **MANUAL DE INSTRUCCIONES** MANUEL D'INSTRUCTIONS



Il lampo con la freccia inserito in un triangolo equilatero avvisa l'utilizzatore della presenza di tensione pericolosa, senza isolamento, all'interno dell'apparecchio che potrebbe essere sufficientemente alta da generare il rischio di scossa elettrica.



Il punto esclamativo inserito in un triangolo equilatero avvisa l'utilizzatore della presenza di importanti istruzioni per l'utilizzo e per la manutenzione nella documentazione che accompagna il prodotto.

IMPORTANTE ! Norme di sicurezza

ATTENZIONE

Nell'interesse della propria e della altrui sicurezza, e per non invalidare la garanzia, si raccomanda una attenta lettura di questa sezione prima di adoperare il prodotto.

- Questo apparecchio è stato progettato e costruito per venire utilizzato come sistema di altoparlanti con amplificatore nel contesto tipico di un sistema di amplificazione sonora e/o di un sistema di registrazione sonora. L'utilizzo per scopi diversi da questi non è contemplato dal costruttore, ed avviene pertanto sotto la diretta responsabilità dell'utilizzatore/installatore.

PER EVITARE IL RISCHIO DI INCENDIO E/O DI FOLGORAZIONE:

- Non esporre il prodotto alla pioggia, non utilizzarlo in presenza di elevata umidità o vicino all'acqua. Non lasciare penetrare all'interno dell'apparecchio alcun liquido, né alcun oggetto solido. In caso ciò avvenga, scollegare immediatamente l'apparecchio dalla rete elettrica e rivolgersi ad un servizio di assistenza qualificato prima di adoperarlo nuovamente.
- Prima di collegare l'apparecchio alla rete elettrica assicurarsi che la tensione corrisponda a quella indicata sull'apparecchio stesso.
- Collegare questo apparecchio esclusivamente ad una presa di corrente dotata di contatto di terra, rispondente alle norme di sicurezza vigenti, tramite il cavo di alimentazione in dotazione. Nel caso in cui il cavo necessiti di sostituzione, utilizzare esclusivamente un cavo di identiche caratteristiche.
- Non appoggiare alcun oggetto sul cavo di alimentazione. Non posarlo dove possa costituire intralcio e causare inciampo. Non schiacciarlo e non calpestarlo.
- Installare questo apparecchio prevedendo ampio spazio circostante per un'abbondante circolazione d'aria, necessaria al raffreddamento. Non ostruire le aperture o le prese d'aria presenti sull'apparecchio.
- In caso di sostituzione del fusibile esterno, utilizzare esclusivamente un fusibile di caratteristiche identiche, come riportato sull'apparecchio.
- Prima di effettuare qualsiasi operazione di collegamento, assicurarsi che l'interruttore di accensione dell'apparecchio sia in posizione 'Off'.
- Prima di effettuare qualsiasi spostamento del prodotto già installato o in funzione, rimuovere tutti i cavi di collegamento.
- Per scollegare l'apparecchio dalla rete elettrica, non tirare mai lungo il cavo, ma afferrarlo sempre per il connettore.

ATTENZIONE!

Questo apparecchio non contiene parti interne destinate all'intervento diretto da parte dell'utilizzatore. Per evitare il rischio di incendio e/o folgorazione, non aprirlo. Per qualsiasi intervento di manutenzione o riparazione, rivolgersi alla Elettronica Montarbo srl e/o a personale altamente qualificato specificamente segnalato da questa.

- Nel predisporre l'apparecchio all'utilizzo, assicurarsi che la forma e la portata della superficie di appoggio siano idonee a sostenerlo. Non tentare mai di appendere il prodotto con mezzi non espressamente forniti o approvati dal costruttore (corde, catene, funi o qualsivoglia altro mezzo, attraverso maniglie, bulloni, ganci etc.). Nel caso il prodotto sia dotato già dalla fabbrica di specifici accessori, verificare sempre, prima dell'installazione, che il sistema di sollevamento e/o di sospensione che intendete utilizzare sia di portata idonea al peso del prodotto.

- Per evitare urti, calci, inciampi riservate come luogo per l'istallazione del prodotto un'area protetta inaccessibile a personale non qualificato. Qualora l'apparecchio venga utilizzato in presenza di bambini e animali, si rende necessaria una strettissima sorveglianza.

- Questo prodotto è in grado di generare pressioni acustiche molto elevate, pericolose per la salute del sistema uditivo. Evitarne quindi l'utilizzo ad elevati livelli acustici se il pubblico si trova eccessivamente vicino al prodotto (almeno ad 1 m di distanza). Non esporre i bambini a forti sorgenti sonore.

ITALIANO

INDICE

Introduzione	3
Descrizione	3
Pannello controlli e connessioni	4
Importante !!!	5
Appendix	10 - 15
► Dati tecnici	11
► Schemi a blocchi	12
► Connettori	13
► Esempio di collegamento	14
► Parti di ricambio	15

Introduzione

Le casse acustiche bass reflex 260A (a 2 vie), 412A e 415A (a 3 vie), incorporano:


- componenti di alta qualità realizzati su nostre specifiche.
- amplificatori Mosfet dedicati, controllati da processore:
250 W continui, 400 W di picco per la 260A, 400 W continui, 600 W di picco per la 412A e la 415A.

I sistemi di altoparlanti attivi 260A, 412A e 415A sono la risposta alle necessità del pianobar, della piccola band o dell'orchestra che richiede versatilità e prestazioni in una cassa compatta e leggera.


Le caratteristiche di base dei tre sistemi differiscono per risposta in frequenza e pressione sonora massima. Ognuno dei tre sistemi incorpora un cross-over passivo di alta qualità affiancato da un processore passivo che ottimizza il rendimento e la linearità di risposta del sistema. In aggiunta a questo è incorporato un processore attivo che controlla i parametri di funzionamento dell'amplificatore e degli altoparlanti in tempo reale, per garantire le massime prestazioni senza il rischio di sovraccarichi e distorsioni.

Descrizione


260A

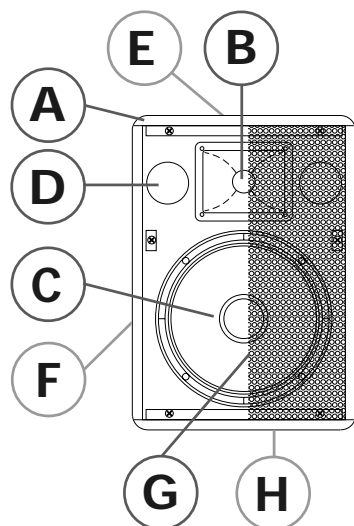

412A

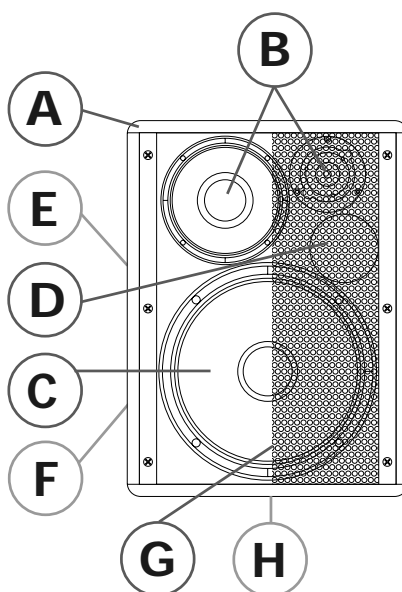

415A

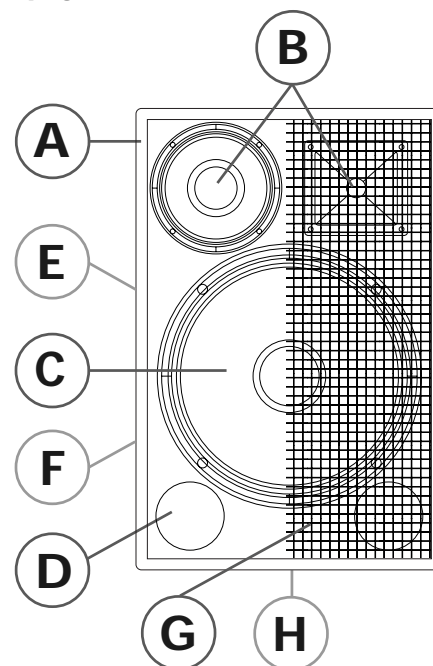


- A** Costruzione in multistrato di betulla ad incollaggio fenolico.
- B** **260A:** tromba alte frequenze (dispersione 90° H x 60° V) con driver dinamico da 1".
412A: midrange da 6" + tweeter.
415A: midrange da 6" + tromba alte frequenze (dispersione 90° H x 60° V) con driver dinamico da 1".
- C** **260A:** woofer 10" ad alta efficienza.
412A: woofer 12" ad alta efficienza.
415A: woofer 15" ad alta efficienza.

- D** Tubi di accordo.
- E** Maniglie per il trasporto.
- F** Pannello controlli e connessioni.
- G** Griglia di protezione.
- H** Adattatore per supporto cassa.

I materiali e la costruzione rispettano i più alti standard professionali per assicurare la massima affidabilità.

Pannello controlli e connessioni

Il pannello controlli e connessioni è uguale per tutti e tre i modelli.

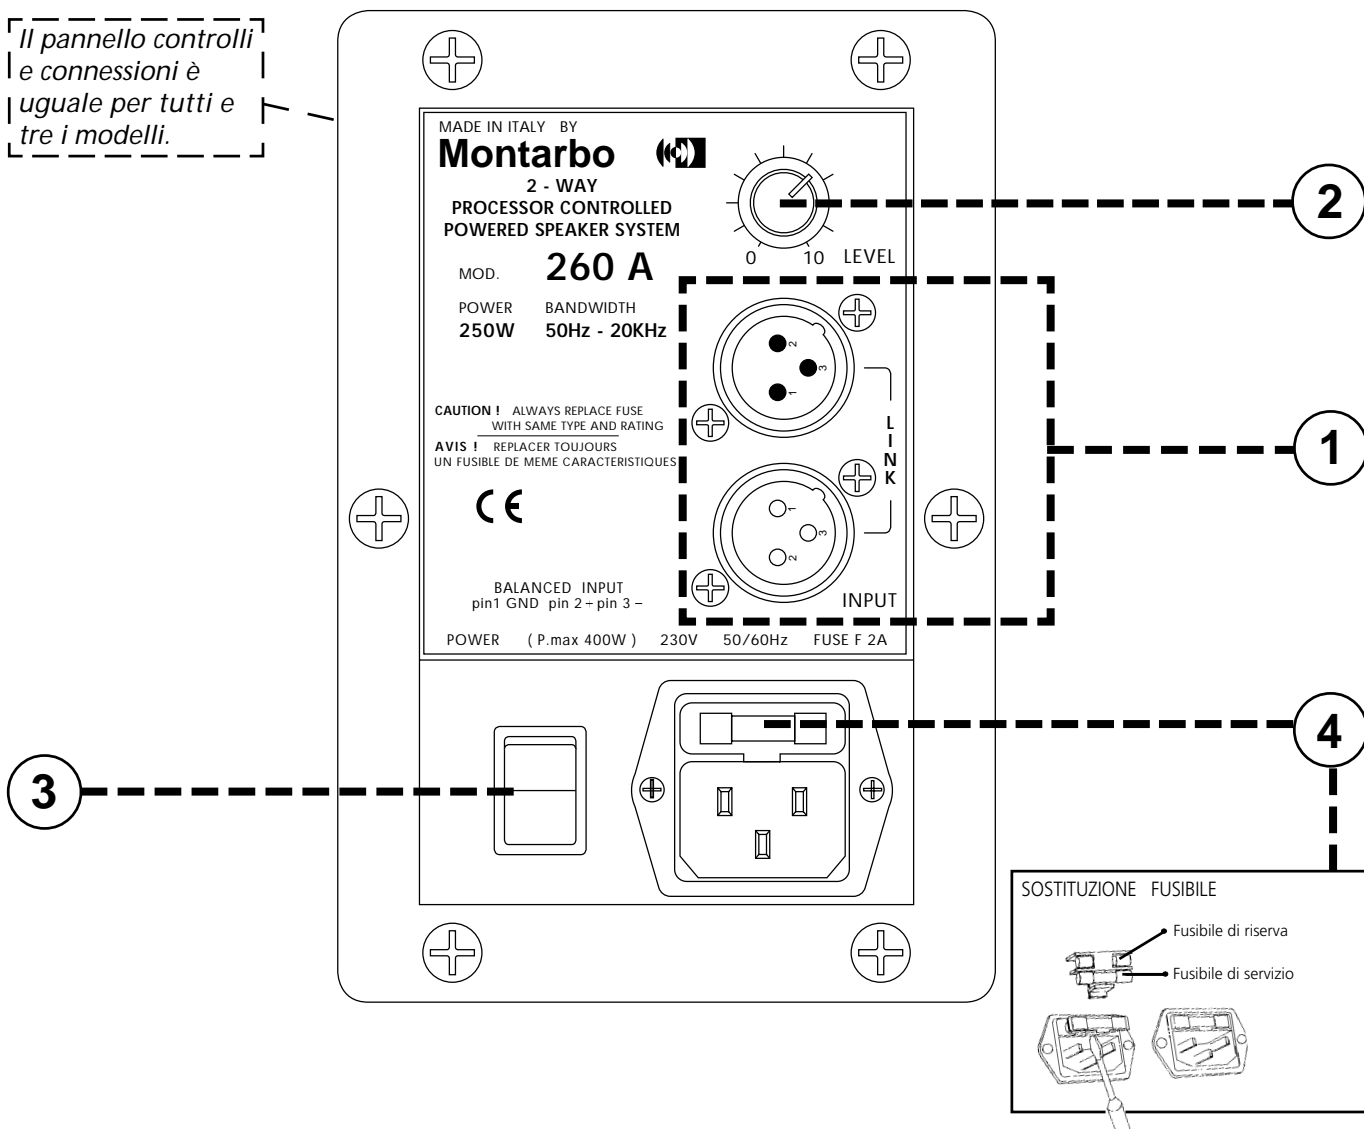

1 Ingressi bilanciati collegati in parallelo, con prese XLR maschio e femmina.
 Ciò semplifica il collegamento in parallelo di più sistemi.
 ■ uscita mixer → ingresso cassa (presa XLR femmina)
 ■ uscita cassa (presa XLR maschio) → ingresso della cassa da collegare in parallelo (presa XLR femmina).

☞ Vedere i connettori e l'esempio di collegamento alle pagine **13** e **14**.

2 Volume generale (VOL). Permette di regolare i livelli di ingresso del finale di potenza incorporato, per adattarlo al livello di uscita del mixer.

N.B: se utilizzate un mixer Montarbo, o comunque un mixer avente livello di uscita 0dB, per un rendimento ottimale consigliamo di regolare questo volume al massimo (in senso orario).

3 Interruttore di rete.

4 Presa di rete con fusibile incorporato.

Importante !!!

Cura e manutenzione del prodotto:


- Posizionare la cassa lontano da fonti di calore (caloriferi o qualsiasi altro oggetto che produca calore).
- Evitare di esporre la cassa alla irradiazione solare diretta, ad eccessive vibrazioni e ad urti violenti.
- Evitare l'uso e il deposito in ambienti polverosi o umidi: eviterete così cattivi funzionamenti e deterioramento anticipato delle prestazioni.
- Evitare l'uso vicino a fonti di interferenze elettromagnetiche (video dei monitor, cavi elettrici di alta potenza) ciò potrebbe compromettere la qualità audio.
- Proteggere l'apparecchio dal rovesciamento accidentale di liquidi o sostanze di qualsiasi tipo. In particolare nelle condizioni di utilizzo tipiche, prestare la massima attenzione alla collocazione dell'apparecchio onde evitare che il pubblico, i musicisti, i tecnici o chicchessia possa poggiare bicchieri, tazze, contenitori di cibo o di bevande, posacenere o sigarette accese sull'apparecchio.
- Non togliere la griglia di protezione dalla cassa.
- Per rimuovere la polvere usate un pennello o un soffio d'aria, non usate mai detergenti, solventi o alcool.
- Abbiate cura dei cavi di collegamento, avvolgeteli evitando nodi e torsioni.
- Non forzate i connettori.

Collegamento alla rete:

- accertarsi che l'interruttore di rete sia spento.
- accertarsi che la tensione di rete corrisponda a quella indicata sul pannello.
- utilizzare il cavo di alimentazione a tre poli fornito insieme alla cassa.
- collegarlo ad una presa di corrente dotata di contatto di terra.

Collegamento al mixer:

- Utilizzare sempre solo cavi SCHERMATI (cavi di segnale) di adeguata sezione e di buona qualità.
- Prima di effettuare i collegamenti tra casse attive e mixer accertarsi che tutti gli interruttori di rete siano spenti. In tal modo si eviteranno fastidiosi rumori e picchi di segnale talvolta pericolosi per le casse stesse.

 *Vedere l'esempio di collegamento a pagina 14.*

Se il mixer ha uscite bilanciate:


- utilizzare dei normali connettori XLR bilanciati.

Se il mixer ha uscite sbilanciate XLR:

- in tal caso se il mixer non è un Montarbo, è bene accertarsi che le uscite XLR del mixer siano sbilanciate a norme IEC 268 e cioè: 1 = GND, 2 = HOT, 3 = GND.

Collegamento in parallelo di più casse amplificate:

- Utilizzare sempre solo cavi SCHERMATI (cavi di segnale) di adeguata sezione e di buona qualità.

 *Vedere l'esempio di collegamento a pagina 14.*



The lightning flash with arrowhead symbol within an equilateral triangle, is intended to alert the user to the presence of uninsulated 'dangerous voltage' within the product's enclosure, that may be of sufficient magnitude to constitute a risk of electric shock to humans.



The exclamation point within an equilateral triangle, is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

IMPORTANT ! SAFETY INSTRUCTIONS

WARNING

In order to protect your own and others' safety and to avoid invalidation of the warranty of this product, please read this section carefully before operating this product.

- This product has been designed and manufactured for being operated as active speaker system in the applications typical of a sound reinforcement system or of a sound recording system. Operation for purposes and in applications other than these has not been covered by the manufacturer in the design of the product, and is therefore to be undertaken at end user's and/or installer's sole risk and responsibility.

TO AVOID THE RISK OF FIRE AND/OR ELECTRIC SHOCK:

- Never expose this product to rain or moisture, never use it in proximity of water or on a wet surface. Never let any liquid, as well as any object, enter the product. In case, immediately disconnect it from the mains supply and refer to servicing before operating it again.
- Before connecting this product to the mains supply, always make sure that the voltage on the mains outlet corresponds to that stated on the product.
- This product must be connected only to a grounded mains outlet complying to the safety regulations in force via the supplied power cable. In case the power cable needs to be substituted, use exclusively a cable of the same type and characteristics.
- Never place any object on the power cable. Never lay the power cable on a walkway where one could trip over it. Never press or pinch it.
- Never install the product without providing adequate airflow to cool it. Never obstruct the air intake openings on it.
- In case the external fuse needs replacement, substitute it only with one of the same type and rating, as stated on the product.
- Always make sure the On/Off switch is in its 'Off' position before doing any operation on the connections of the product.
- Before attempting to move the product after it has been installed, remove all the connections.
- To disconnect the power cable of this product from the mains supply never pull the cable directly instead, hold the body of the plug firmly and pull it gently from the mains supply outlet.

CAUTION!

This product does not contain user serviceable parts. To prevent fire and/or electrical shock, never remove its cover. For maintenance and servicing always refer to the official Montarbo Distributor in your State or to qualified personnel specifically authorised by the Distributor.

- Before placing the product on a surface of any kind, always make sure that its shape and load rating will safely match the product's size and weight. Never attempt to hang the product by any means not expressly provided or approved by the manufacturer (i.e. ropes, chains, belts or whatever medium, through carrying handles, bolts, hooks or whatever).

In case the product is factory-fitted with specific mounting hardware, always verify before installation that the lifting and/or hanging system you intend to use is of a proper type and can carry the product weight with the safety ratio required by the regulations in force.

- To avoid shocks, kicks, or whatever action, always reserve a protected area with no access to unqualified personnel as installation site of the product. In case the product is used near children and animals closest supervision is necessary.

- This product can generate very high acoustic pressures which are dangerous for the hearing system. Always avoid operation at loud levels if anyone is excessively near to the product (at least 1 m of distance). Never expose children to high sound sources.

ENGLISH

INDEX

<i>Introduction</i>	7
<i>Description</i>	7
<i>Control and connection panel</i>	8
<i>Important !!!</i>	9
<i>Appendix</i>	10 - 15
▶ Specifications	11
▶ Block diagrams	12
▶ Connectors	13
▶ Connection example	14
▶ Spare parts	15

Introduction

The 2-way (260A) and 3-way (412A and 415A) bass reflex enclosures incorporate:

- custom designed, high quality components.
- dedicated, processor controlled, MosFet power amplifiers:
250 W continuous, **400 W** peak in the **260A**,
400 W continuous, **600 W** peak in the **415A**
 and in the **412A** as well.


The 260A, 412A and 415A active loudspeaker systems are designed to meet the stringest requirements in versatility, ruggedness and sonic performances for mid-size applications.

These are compact, lightweight systems differing only for frequency response and sound pressure, not overall quality.


Each of them is fitted with a high quality passive cross-over network together with a passive controller that linearizes and protects the loudspeakers. Moreover you find an active processor that constantly monitors the operating conditions of amplifier and loudspeakers to prevent over-loading and distortion.

Description


260A

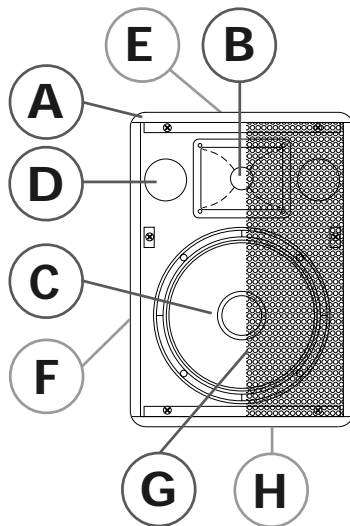

412A

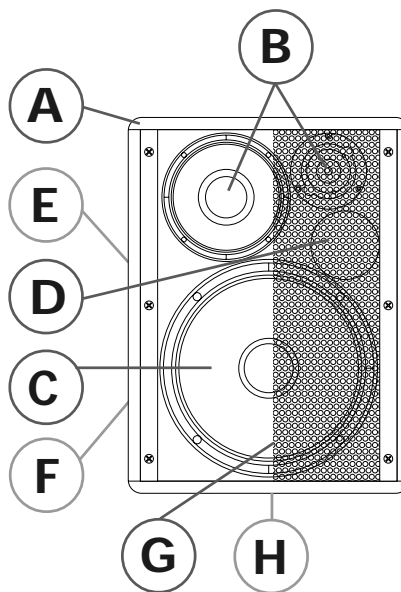

415A

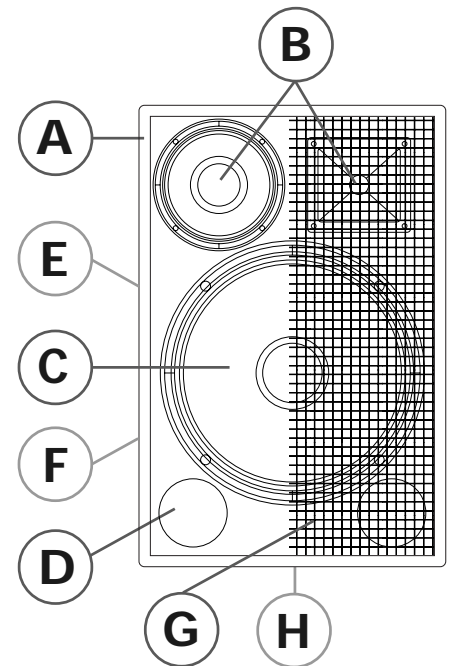

A High grade birch plywood construction, phenolic glued.

B 260A: high frequency horn (dispersion 90° H x 60° V) with 1" dynamic driver.

412A: 6" midrange + tweeter.

415A: 6" midrange + high frequency horn (dispersion 90° H x 60° V) with 1" dynamic driver.

C 260A: 10" high efficiency woofer.

412A: 12" high efficiency woofer.

415A: 15" high efficiency woofer.

D Tunig ports.

E Transport handles


F Control and connection panel.

G Protection grid.

H Speaker stand adaptor.

Construction and components conform to the highest professional standards for maximum reliability.

Control and connection panel

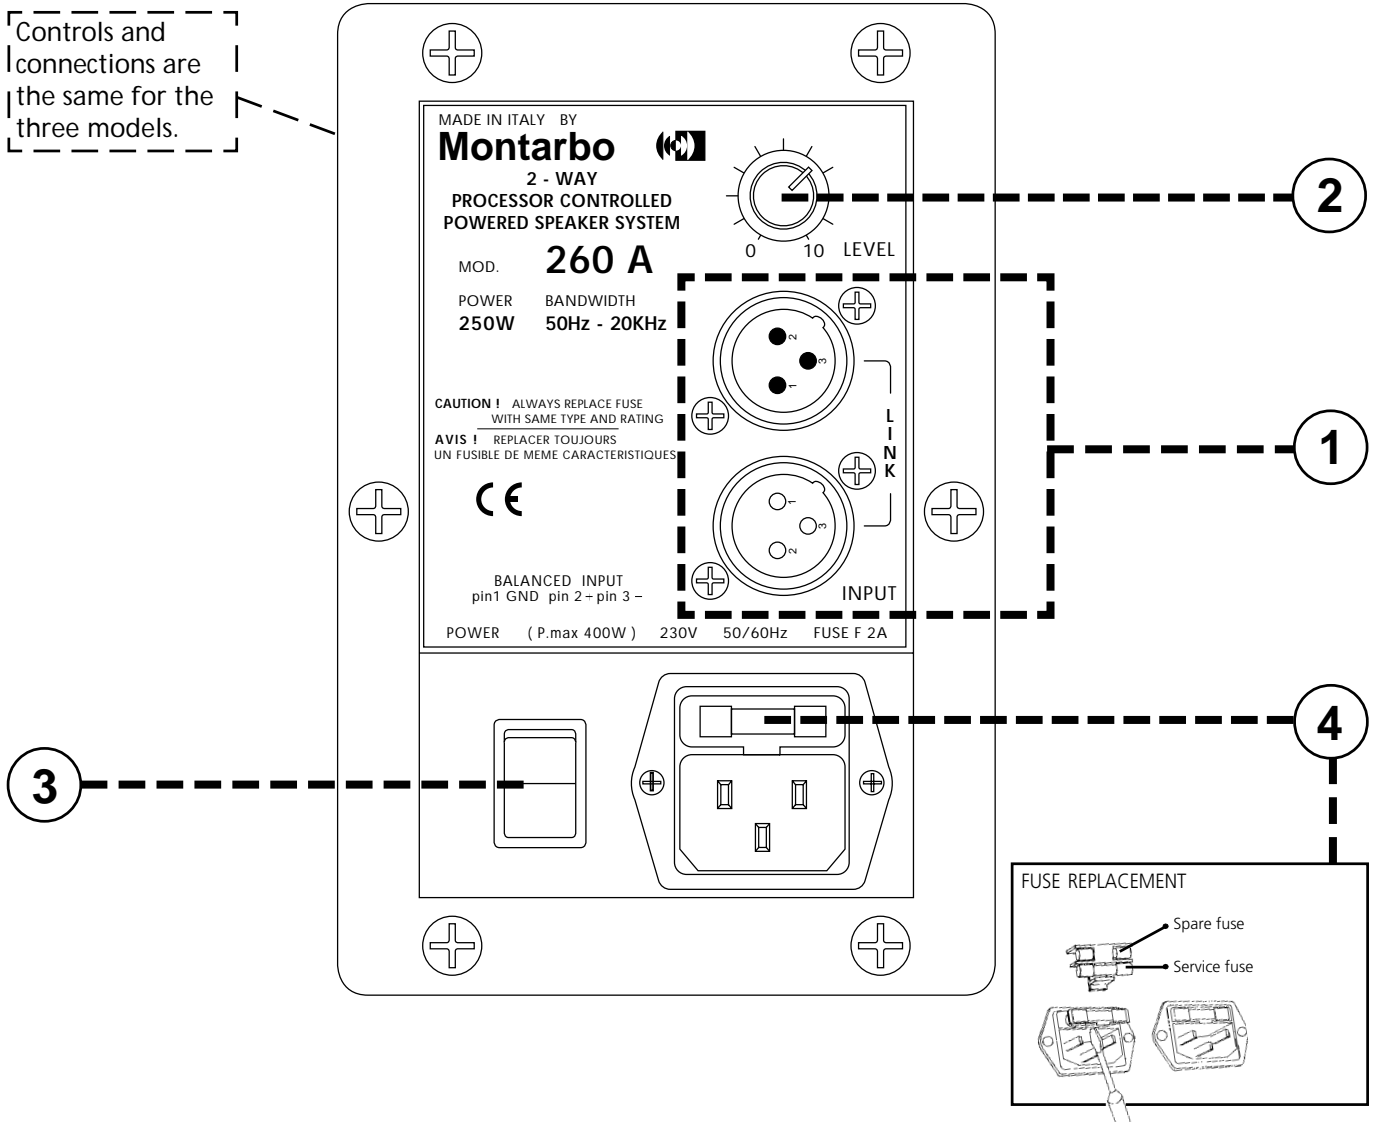

1 Balanced XLR male and female sockets, wired in parallel, allowing easier parallel connection of more systems.

- Mixer output → speaker system input (XLR female socket)
- Speaker system output (XLR male socket) → input of the speaker system to be connected in parallel (XLR female socket).

☞ See 'connectors' and 'connection example' at pages 13 and 14

2 Main volume (VOL). Adjusts the input level of the built-in power amplifier to adapt it to the output level of the mixer.

Note: if you are using a Montarbo mixer (or any other mixer having an output level of 0dB), for optimum performance it is advisable to set this control fully clockwise (to its maximum setting).

3 Mains power switch.

4 I.E.C. power supply socket with built-in fuse.

Important !!!

Product Care and Maintenance


- Never expose the enclosure to heat sources such as radiators or other products that produce heat.
- Never expose the enclosure to direct sunlight, excessive vibrations or mechanical shocks.
- Avoid operating and storing the enclosure in damp or dusty places: this will avoid malfunctions, premature degrading of specifications.
- Avoid using the enclosure close to strong sources of electromagnetic interferences (e.g. video monitors, high power electrical cabling). This may lead to degradation of audio quality.
- Care should be taken so that objects do not fall and liquid are not spilled into the enclosure. In public event don't let people, musicians, technicians or anyone put glasses, cups, ashtrays or cigarettes on the enclosure.
- Always leave the protective grille mounted on the enclosure.
- Use a soft brush or a jet of air to clean the enclosure. Do not use alcohol, solvents or detergents.
- Take care of your connector cables. Make sure that they are not damaged, knotted or twisted.
- Do not force the connectors.
- Make sure the mains power switch is off before doing any connection.

Power supply connection:

- check that mains voltage corresponds to the voltage indicated on the panel.
- use the three wire power cord supplied with the enclosure.
- always connect it to a grounded outlet.

Connection to the mixer:

- Always make sure to use only heavy gauge, high quality **SHIELDED cables** (*signal cables*).
- Always make certain that the mixer and the powered enclosures are switched off before connecting them. This shall to avoid annoying noises and signal peaks, which can also be dangerous for the enclosures themselves.

 See 'connection example' page **14**

If the mixer has **balanced outputs**:


- use standard balanced XLR connectors.

If the mixer has **XLR unbalanced outputs**:

- in this case, unless you are using a Montarbo mixer, make sure that the XLR outs on the mixer are unbalanced to IEC 268 standard: 1 = GND, 2 = HOT, 3 = GND.

Parallel connection:

- Always make sure to use only heavy gauge, high quality **SHIELDED cables** (*signal cables*).

 See 'connection example' page **14**

APPENDIX


<i>Specifications</i>	10
<i>Block diagrams</i>	11
<i>Connectors</i>	12
<i>Connection example</i>	13
<i>Spare parts</i>	14

Specifications


Technical specifications	260A	415A	415A
Speaker system	2-way bass reflex	3-way bass reflex	3-way bass reflex
Components:	custom designed	custom designed	custom designed
- bass frequencies	10" high efficiency woofer	12" high efficiency woofer	15" high efficiency woofer
Nominal diameter	10"	12"	15"
Nominal impedance	8Ω	8Ω	8Ω
Frequency range	50÷5500Hz	48÷5000Hz	40÷3,800Hz
Power capacity	250W	400W	400W
Sensitivity	101,5dB	102,5dB	103dB
Net weight	4,6 Kg	8,9 Kg	8,6 Kg
Thiele & Small Parameters			
fs	96Hz	48,4Hz	41,4Hz
Re	5,6 Ω	5,7 Ω	5,3 Ω
Qms	13,5	7,79	8,97
Qes	0,701	0,27	0,39
Qts	0,666	0,26	0,37
Vas	17,3dm ³	110,29dm ³	227dm ³
B.1	10,87/m	15,617/m	15,357/m
SD	330cm ²	522cm ²	855cm ²
Xmax	±1,6mm	±3,2mm	±3,8mm
Mms	24gr	37,40gr	66,5gr
Le	0,75mH	0,79mH	0,56mH
- mid frequencies		6" midrange	6" midrange
		Nominal diameter: 6"	Nominal diameter: 6"
		Nominal impedance: 8Ω	Nominal impedance: 8Ω
		Frequency range: 130÷7000Hz	Frequency range: 130÷7000Hz
		Power capacity: 90W	Power capacity: 90W
		Sensitivity: 100dB	Sensitivity: 100dB
		Voice coil diameter: 38,5mm	Voice coil diameter: 38,5mm
		winding material: aluminium	winding material: aluminium
		Dome material: kapton	Dome material: kapton
		Net weight: 2,8 kg	Net weight: 2,8 kg
		Thiele & Small Parameters	Thiele & Small Parameters
		fs: 125Hz	fs: 125Hz
		Re: 5,3Ω	Re: 5,3Ω
		Qms: 2,77	Qms: 2,77
		Qes: 0,472	Qes: 0,472
		Qts: 0,403	Qts: 0,403
		Vas: 5dm ³	Vas: 5dm ³
		B.1: 8,47/m	B.1: 8,47/m
		SD: 132cm ²	SD: 132cm ²
		Xmax: ±0,6mm	Xmax: ±0,6mm
		Mms: 8,2gr	Mms: 8,2gr
		Le: 0,32mH	Le: 0,32mH
- high frequencies	H.F. horn	bullet radiator, H.F. tweeter	H.F. horn
	- Exponential horn	Nominal impedance: 8Ω	- Exponential horn
	Nominal coverage: (HxV) 90°x 60°	DC resistance: 4,6Ω	Nominal coverage: (HxV) 90°x 60°
	Cutoff frequency: 1500Hz	Power capacity: 30W	Cutoff frequency: 1500Hz
	Throat diameter: 1"	Sensitivity: 107dB	Throat diameter: 1"
	Material: aluminium cast	Frequency range: 4,5÷20kHz	Material: aluminium cast
	Dimensions: 150 x 13 x 89 mm	Recommended crossover: 4500Hz; 12dB/oct	Dimensions: 150 x 13 x 89 mm
	Net weight: 550 gr	Voice coil diameter: 32,4mm	Net weight: 550 gr
	- Driver	Winding material: aluminium	- Driver
	Throat diameter: 1"	Inductance: 0,08mH	Throat diameter: 1"
	Nominal impedance: 8 Ω	Flux density: 1,2T	Nominal impedance: 8 Ω
	DC resistance: 6,2 Ω	Overall diameter: 102mm	DC resistance: 6,2 Ω
	Power capacity: 60 W	Depth: 62mm	Power capacity: 60 W
	Sensitivity: 106dB	Net weight: 1,1kg	Sensitivity: 106dB
	Frequency range: 1,5÷18kHz		Frequency range: 1,5÷18kHz
	Recommended crossover: 1700Hz; 12dB/oct		Recommended crossover: 1700Hz; 12dB/oct
	Voice coil diameter: 44mm		Voice coil diameter: 44mm
	Winding material: aluminium		Winding material: aluminium
	Inductance: 0,11mH		Inductance: 0,11mH
	Flux density: 1,4T		Flux density: 1,4T
	Overall diameter: 102 mm		Overall diameter: 102 mm
	Depth: 58mm		Depth: 58mm
	Net weight: 1,5 kg		Net weight: 1,5 kg
Impedance	8 ohm	8 ohm	8ohm
Frequency response	50Hz ÷ 20kHz	45Hz ÷ 20kHz	40Hz ÷ 20kHz
	- bass: 50Hz ÷ 1800 Hz	- bass: 45Hz ÷ 700 Hz	- bass: 40Hz ÷ 700 Hz
	- mid/high: 1800Hz ÷ 20kHz	- mid: 700Hz ÷ 4,5kHz	- mid: 700Hz ÷ 3,5kHz
		- high: 4,5kHz ÷ 20kHz	- high: 3,5kHz ÷ 20kHz
Sensitivity (1W / 1m)	101,5 dB	102,5dB	103dB
Max SPL	126 dB	129 dB	130 dB
Built-in passive crossover:			
crossover frequency	1800Hz,	700Hz	700Hz
slope	18dB/oct.	6dB/oct.	6dB/oct.
		4,5kHz	3,5kHz
		18dB/oct.	18dB/oct.
Built-in power amplifier	MosFet, class AB	MosFet, class AB	MosFet, class AB
Max. output power	250 W continuous	400 W continuous	400 W continuous
	400 W peak	600 W peak	600 W peak
Frequency response	10Hz ÷ 40kHz ±1dB	10Hz ÷ 40kHz ±1dB	10Hz ÷ 40kHz ±1dB
Input impedance	10KΩ (balanced)	10KΩ (balanced)	10KΩ (balanced)
Input sensitivity	0dB (775 mV)	0dB (775 mV)	0dB (775 mV)
Noise referred to input	-110dB (A weighted)	-110dB (A weighted)	-110dB (A weighted)
Power supply (Europe and Asia)	230V AC 50÷60Hz	230V AC 50÷60Hz	230V AC 50÷60Hz
Power supply (USA and Canada)	117V AC 50÷60Hz	117V AC 50÷60Hz	117V AC 50÷60Hz
Fuse (Europe and Asia)	F 2 AL	F 3,15 AL	F 3,15 AL
Fuse (USA and Canada)	F 4 AL	F 6,3 AL	F 6,3 AL
Connections	Balanced inputs (wired in parallel): 1XLR male + 1 XLR female.	Balanced inputs (wired in parallel): 1XLR male + 1 XLR female.	Balanced inputs (wired in parallel): 1XLR male + 1 XLR female.
Construction	phenolic-glued multiply birch	phenolic-glued multiply birch	phenolic-glued multiply birch
Dimensions (w x h x d):	33 x 41 x 32 cm	41 x 55 x 35 cm	45 x 67,5 x 40 cm
Weight	21 Kg	27,5 Kg	36 Kg

Block diagrams


260A

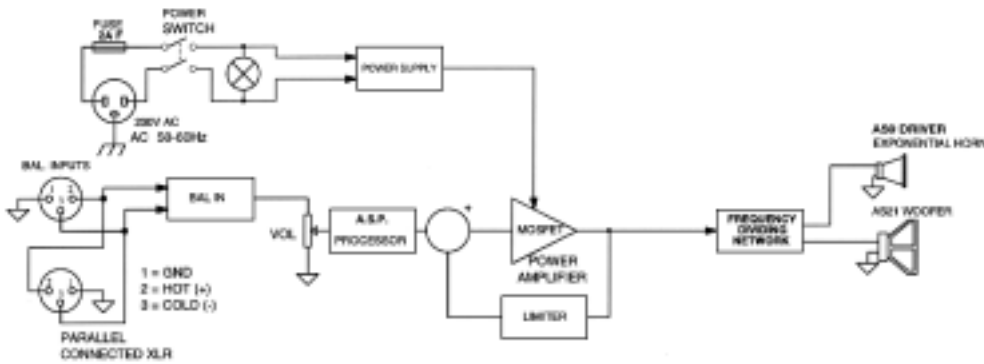


260A Response curve

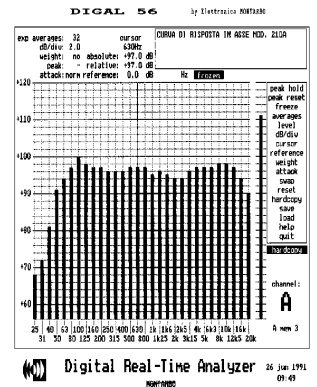


412A

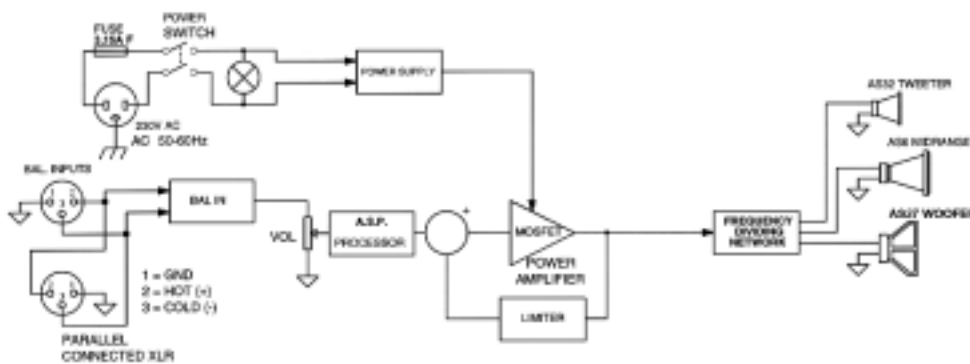


412A Response curve

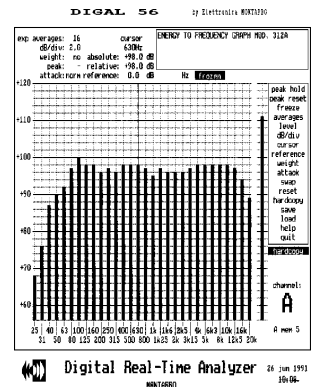


415A

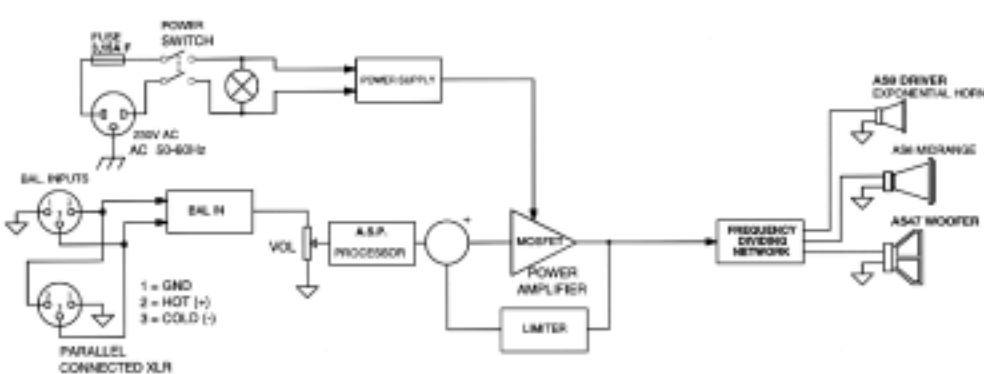

415A Response curve

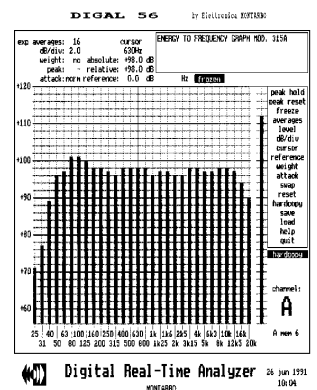


Connectors

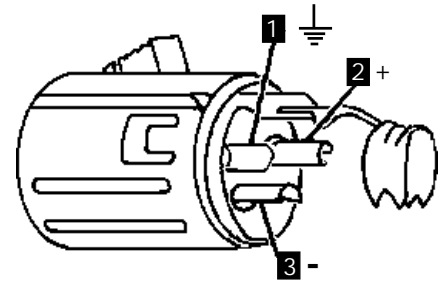


BALANCED XLR FEMALE CONNECTOR

BALANCED CONNECTORS:

- 1 GND Ground
 - 2 + Hot
 - 3 - Cold
- (standard IEC 268)

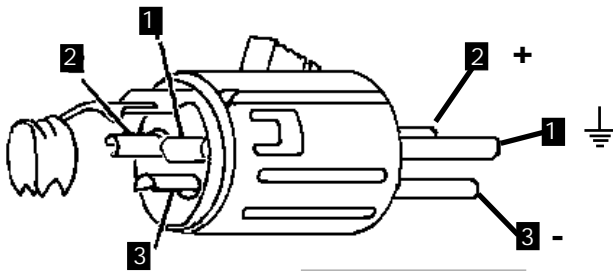


BALANCED XLR MALE CONNECTOR

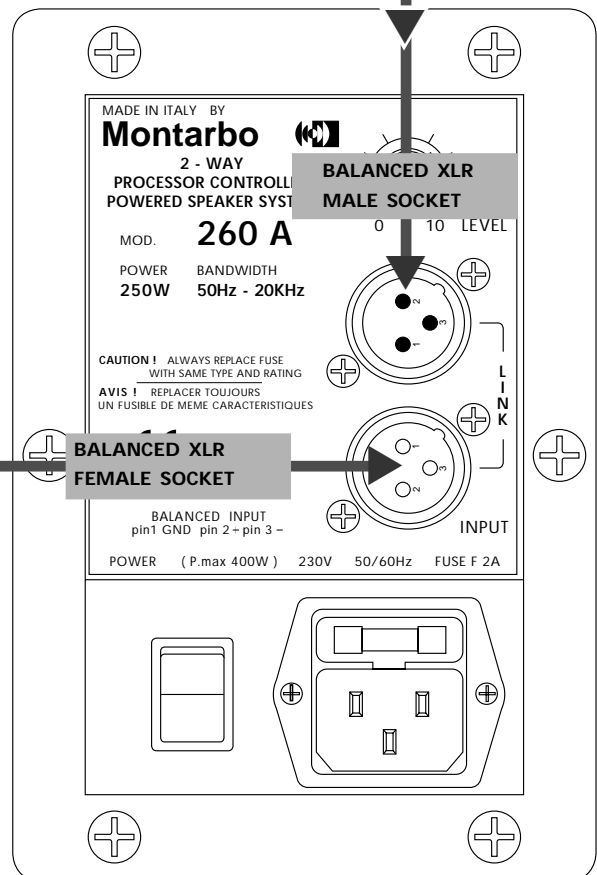


☞ IN CASE YOU USE **UNBALANCED CONNECTORS**,
 THEY MUST BE WIRED AS FOLLOWS: **1 GND** Ground
2 + Hot
3 - Grond
 (standard IEC 268)

Connection example

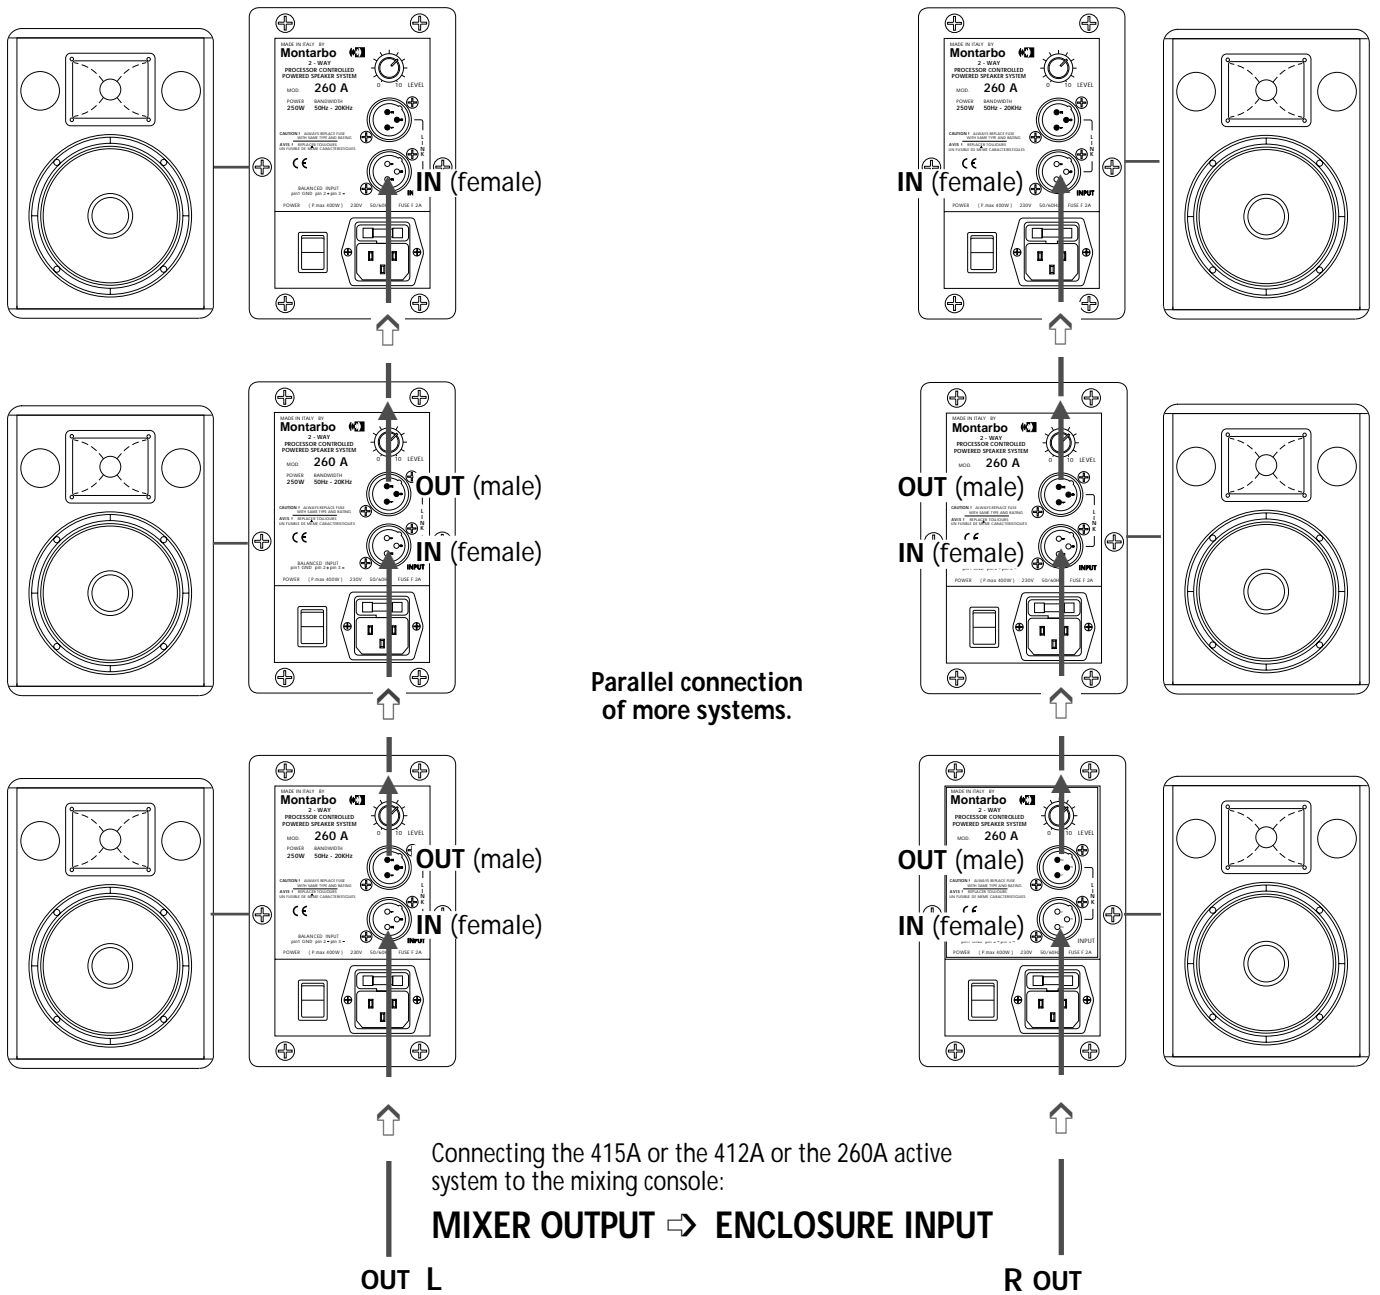


Connecting the 415A or the 412A or the 260A active system to the mixing console:

MIXER OUTPUT → ENCLOSURE INPUT

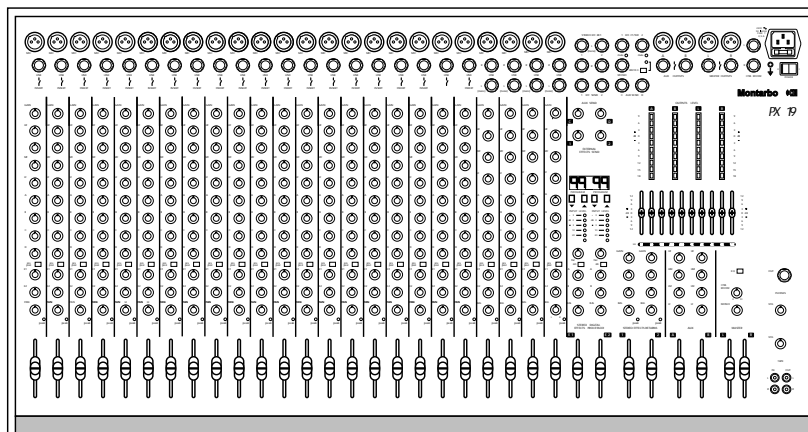


Spare parts


260A

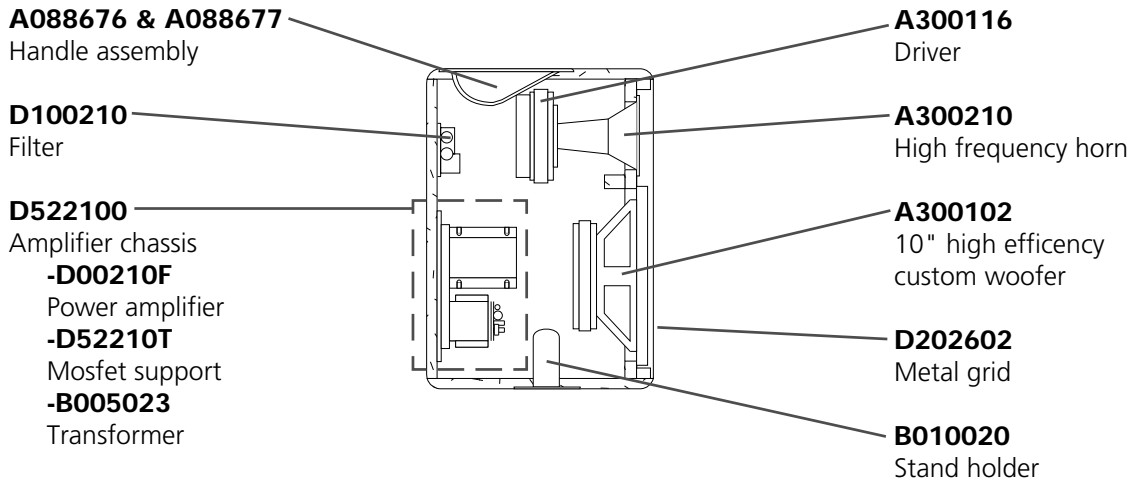


412A

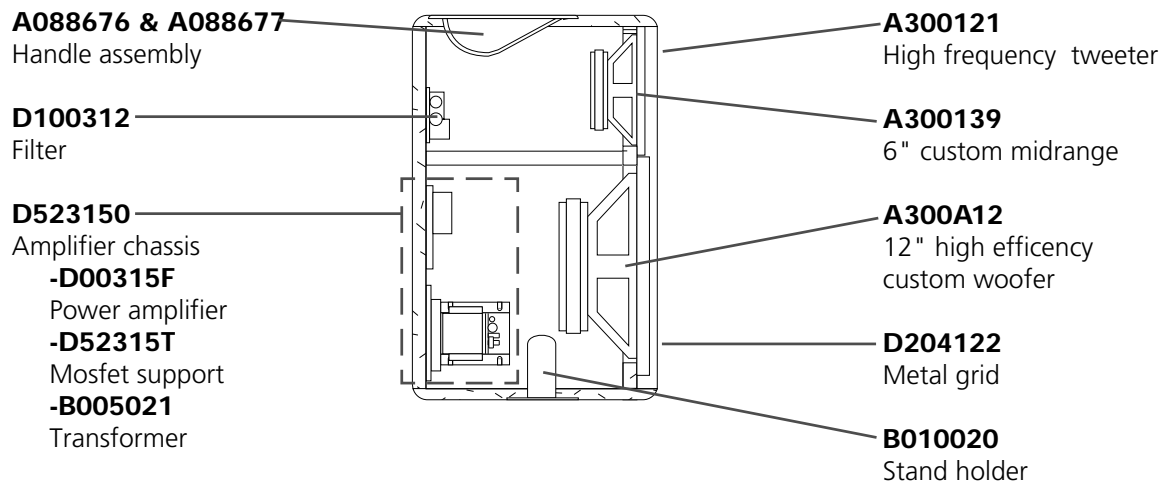

415A

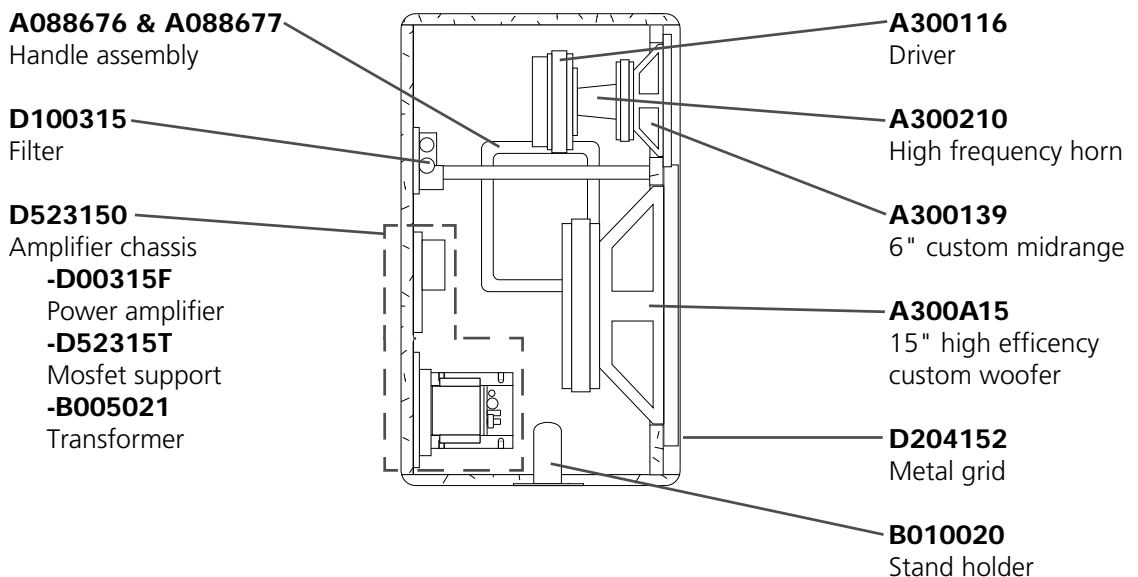

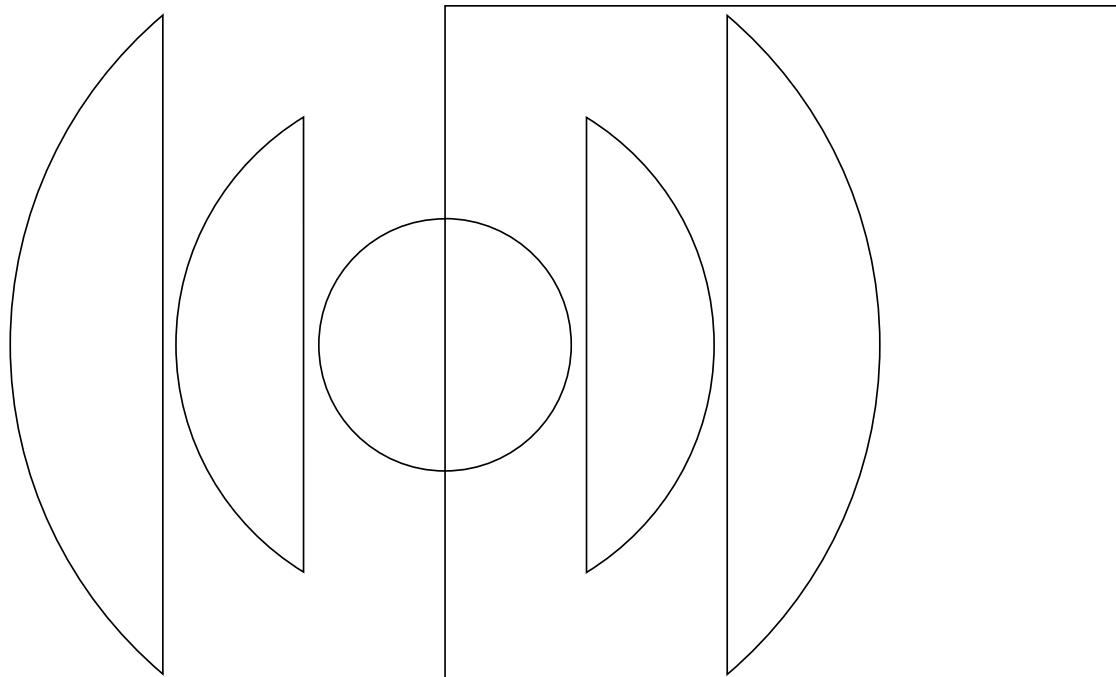

Le informazioni contenute in questo manuale sono state attentamente redatte e controllate. Tuttavia non si assume alcuna responsabilità per eventuali inesattezze.

Questo manuale non può contenere una risposta a tutti i singoli problemi che possono presentarsi durante l'installazione e l'uso dell'apparecchio. Siamo a vostra disposizione per fornirvi eventuali ulteriori informazioni e consigli.

La Elettronica Montarbo srl non può essere ritenuta responsabile per danni o incidenti a cose o persone, causati o connessi all'utilizzazione o malfunzionamento dell'apparecchio.

Les indications contenues en ce manuel ont été attentivement rédigées et contrôlées.

Toutefois nous n'assumons aucune responsabilité pour des éventuelles inexacitudes.

Ce manuel ne peut contenir une réponse pour problèmes particuliers qui pourraient se présenter lors de l'installation et de l'usage de l'appareil. Nous sommes à votre disposition pour d'éventuels conseils et informations supplémentaires.

Elettronica Montarbo srl ne peut être considéré responsable des dommages causés à des personnes ou à des objets lors de l'utilisation du produit.

Las informaciones contenidas en este manual han sido atentamente redactas y verificadas.

De todos modos no asumimos alguna responsabilidad de eventuales inexacitudes.

Este manual no puede contener una respuesta a todos los problemas que pueden presentarse durante la instalación y el uso de estos aparatos. Estamos a vuestra disposición para facilitar informes y consejos.

Elettronica Montarbo srl no puede ser considerada responsable de daños que puedan ser causados a personas o cosas derivados de la utilización del aparato.

elettronica **Montarbo** srl
via G. di Vittorio 13
40057 Cadriano di Granarolo
Bologna, Italy

Tel. +39. 051. 76 64 37

Fax. +39. 051. 76 52 26

E-mail: mail@montarbo.com

Tlx. 511312 montar i

The information contained in this manual has been carefully drawn up and checked.

However no responsibility will be assumed for any inexactitude.

This manual can not cover all the possible contingencies which may arise during installation and use of the product.

Should further information be desired, please contact us or our local distributor.

Elettronica Montarbo srl can not be considered responsible for damages which may be caused to people and things when using this product.

Die in dieser Bedienungsanleitung enthaltenen Hinweise wurden sorgfältig bearbeitet und korrigiert. Es wird jedoch keine Gewähr für die Richtigkeit der Angaben übernommen.

Diese Bedienungsanleitung kann nicht alle Richtlinien und Probleme berücksichtigen, welche während der Aufstellung und

Verwendung des Gerätes entstehen können. Sollten Sie Fragen haben, wenden Sie sich bitte an uns oder an den für Ihr Land zuständigen Importeur.

Die Elettronica Montarbo srl haftet nicht, für Personen- oder Sachschäden die durch die Verwendung des Gerätes entstehen.

CARATTERISTICHE E DATI TECNICI POSSONO ESSERE MODIFICATI SENZA PRAVAVISO. SPECIFICATIONS AND FEATURES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. ÄNDERUNGEN VORBEHALTEN. LAS CARACTERISTICAS Y LOS DATOS TECNICOS PUEDEN SUFRIR MODIFICACIONES SIN PREVIO AVISO. SOUS RESERVE DE MODIFICATIONS.

Montarbo

